


Product properties

WERZALIT window sills are molded parts coated with decorative film, which are manufactured from wood chips using the WERZALIT process. This is a special form of wood panel production and is characterized by a high degree of material compaction. As a natural product, it can therefore be subject to slight fluctuations. Follow the WERZALIT installation instructions!

Product specification

Surface

Flawless appearance of the visible surface in the installed state in daylight at an observation distance of 1.5 meters



Thickness – front end


Exclusiv - height 34mm -0,5/+1.0



Compact - height 18mm ± 0,5




Product width

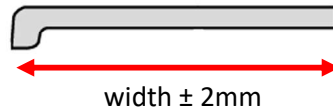

width ± 2mm


- Exclusiv
- Expona

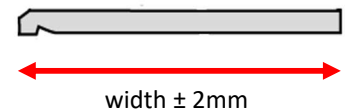

width ± 2mm


- Compact

Length

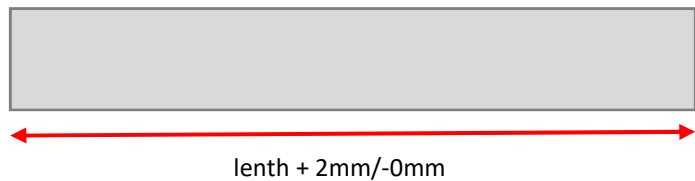

length + 2mm/-0mm

Bend

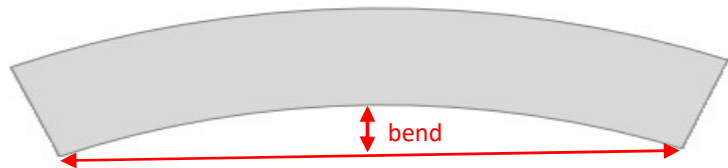

Length	Width < 200mm	Width > 200mm
< 1000 mm	2 mm	1 mm
1001 – 2000 mm	8 mm	4 mm
2001 – 3000 mm	18 mm	9 mm
3001 – 4000 mm	32 mm	16 mm
4001 – 5000 mm	50 mm	25 mm
5001 – 6005 mm	72 mm	36 mm

Non-visible surfaces

Due to the manufacturing process, a backing paper is required on the back of the window sill, which may have small cracks.

01.02.2023/QM